



TITAAAN 2-90
VACUUM PACKAGING MACHINE



FEATURES

- Standard with 2 seal bars (left-right): 2 x 840 mm
- Standard double seal (two wires). Optional without extra costs: Cut-off or Wide seal (10 mm)
- Silicone holders easily removable for cleaning and maintenance purposes
- Pump capacity: 300 m³/h Busch pump
- Pump maintenance and cleaning program
- Machine cycle: 30-50 sec
- Soft Air to protect the product and vacuum bag
- Standard Digital ACS control with sensor
- Flat work plate
- Comes with 2 internal conveyor belts
- Stainless steel exterior
- IP-65 classification
- Compressed Air consumption 100NI/min 6 bar

OPTIONS

- 1-2 Cut-off seal
- Liquid control
- Preparation for external pump
- Heating element for vacuum valve
- Extra seal capacity

ACCESSORIES

- Zebra ZD410 thermal label printer (only in combination with ACS)
- Transport conveyor 400 x 3000 mm or 600 x 3000 mm
- Service kit for standard maintenance

DESCRIPTION

The robust, stainless steel full automatic Titaan 2-90 vacuum packaging machine is standard equipped with a Busch vacuum pump. This automatic machine complies with CE standards.



Henkelman offers standard 3 year warranty.



HENKELMAN BV
 Titaniumlaan 10
 5221 CK 's-Hertogenbosch
 The Netherlands


Sales support
 P +31 73 621 36 71
 E info@henkelman.com
Service/technical support
 P +31 73 621 36 71
 E service@henkelman.com

VACUUM PACAGING MACHINE TITAAN 2-90 – SPECS

VACUUM PACKAGING MACHINE TITAAN 2-90 – SPEC SHEET

DIMENSIONS

In mm

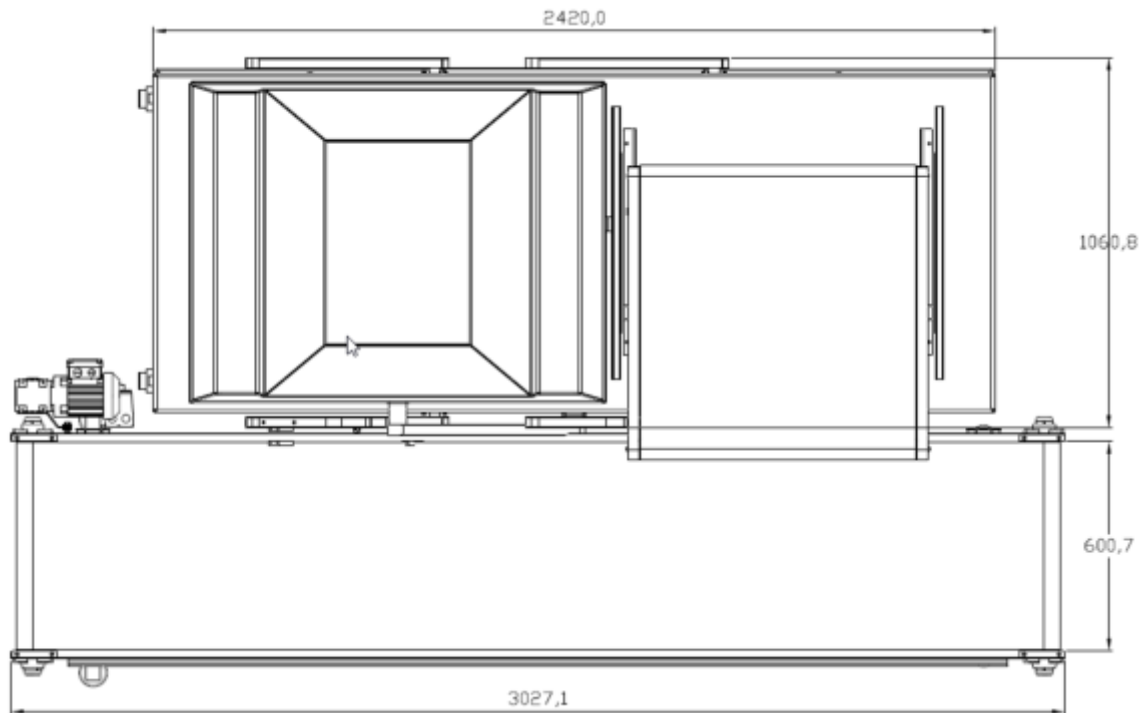

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m ³ /h)	Power (kW)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H				
Titaan 2-90	840 x 890 x 220	1061 x 2420 x 1150	400V-3-50	300	7,0 – 9,0	850

* Other voltages available



HENKELMAN BV
Titaniumlaan 10
5221 CK 's-Hertogenbosch
The Netherlands

Sales support
P +31 73 621 36 71
E info@henkelman.com
Service/technical support
P +31 73 621 36 71
E service@henkelman.com